


	INTAKE	EXHAUST
ADVERTISED DURATION	272°	272°
ACTUAL CAM LIFT (in/mm)	.389" / 9.88mm	.383" / 9.73mm
ROCKER ARM RATIO	1.75:1	1.75:1
CENTERLINE	106°	114°
LOBE SEPERATION	110°	
DURATION AT 0.050" CAM	211°	203°
DURATION AT 0.050" VALVE	227°	219°
VALVE CLEARANCE	.000" / 0mm HYDRAULIC	
RECOMMENDED SPRING KIT	BC0159 or BC0160	

CAMSHAFT TIMING AT 0.050" VALVE LIFT	OPEN	CLOSES
	INTAKE	7.5° BTDC
EXHAUST	43.5° BBDC	-4.5° BTDC

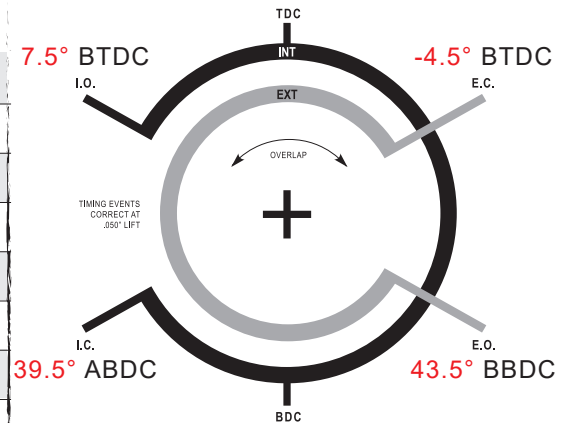

NOTES

BC does not recommend using synthetic oil during break-in or operation. Follow OEM manufacturer's torque sequence and specifications. Use liberal amount of aftermarket engine assembly lube during installation. Check follower or bucket surfaces for abnormal wear and/or scuffing. On initial start-up and break-in run engine at 1500-2500 rpm for 20 minutes. **Camshafts damaged by improper installation, excessive spring pressure or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles.**

